


Bluetooth HS Manual

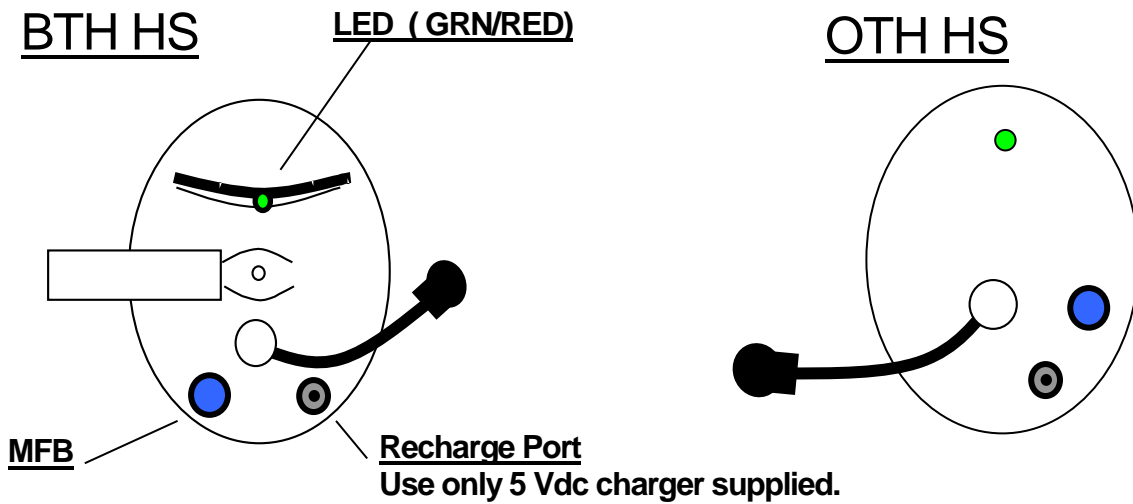

Bluetooth LED

- LED off : Bluetooth off
- GRN LED steady on : Bluetooth power on and no device is connected
- GRN LED blinking slowly (every 2 seconds) : a device connected
- GRN LED blinking fast : pairing mode
- LED is off : charge complete
- RED LED blinking slowly : battery in charge

Bluetooth Multi Functin Button (MFB)

- Long push (4 ~ 6 seconds) : Turn on the Bluetooth
- Short Push : Answer call, hang up call, play music, or pause music
- Long push (2 sec) : Turn off the Bluetooth

How to Pair

1. Make sure the Bluetooth is off (no LED light)
2. Press MFB for about 8 seconds until the GRN LED blinking fast.
3. Go to a device such as Cell, smart phone, IPOD, computer, etc
4. Search for a device name "ATC-HS"
5. Pair and connect the device

Electrical Specifications

RF type	Bluetooth 2.1+EDR Class 2
Frequency	2.400 – 2.485 GHz
Max transmit	+4 dBm
RF sensitivity	-80 dBm
Battery	3.7v Li-Ion 600mAh (1500 mAh for extended battery)
Charging Voltage	5Vdc only
Operation life	At least 24 hours with continuous talking or listening after full charge Standby : more than 10 days
Charging time	3 ~ 10 hours